

HELP NOTE


Horizontal Arrow Board



The arrow board needs to have a red and white hatched surround:

- ✓ Hatching must be a minimum of 500mm above and below the arrow board.
- ✓ Hatching must be a minimum of 350mm either side of the arrow board, or out to the width of the deck of the vehicle.


- ✓ The TV4 “Pass with care” sign must be used with the board.
- ✓ The **RD6** arrow must not be used, as this could conflict with the arrow showing on the arrow board.

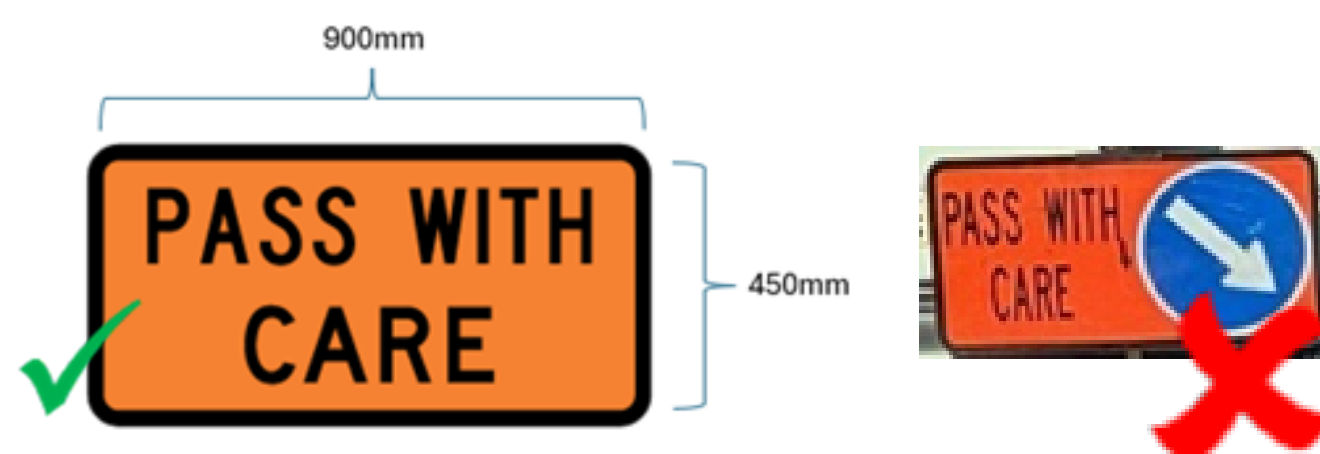

The “Pass with care” sign must be located above or below the red & white hatching...



... and needs to be removed or covered when not needed.

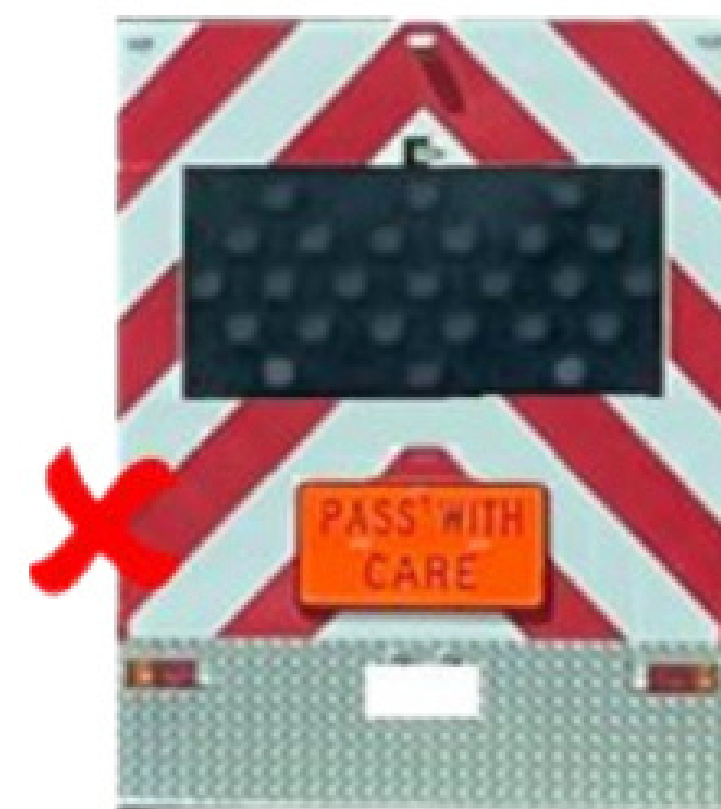

The “Pass with care” sign must **NOT** be located on the red & white hatching.

Based on the following source information:

[m23-road-safety-barrier-systems-appendix-f-working-draft-release.pdf \(nzta.govt.nz\)](#).

[Sign specifications / Waka Kotahi NZ Transport Agency \(nzta.govt.nz\)](#).